





## Near-Infrared ( 0.9 - 1.7 $\mu\text{m}$ ) 640x512 InGaAs Focal Plane Array

### FEATURES

- 640x512 Array Format
- 0.9 $\mu\text{m}$ -1.7 $\mu\text{m}$  Spectral Range
- Light Weight 64CLCC Package
- Typical Pixel Operability >99.5%
- Quantum Efficiency >70%
- Room Temperature Operation
- Built-in Temperature Sensor
- Snapshot ITR/IWR and IMRO Readout Modes
- 2, 4 or 8 Outputs with up to 18MHz Pixel Rate
- Windowing Capability

### APPLICATIONS

- Near-Infrared Imaging
- Covert Surveillance
- Semiconductor/Solar Panel Inspection
- Medical Science and Biology
- Fiberoptic Assembly and Testing
- See through Fog/Smoke
- Ice/Slush/Moisture Mapping
- Industrial Thermal Imaging
- Astronomy and Scientific

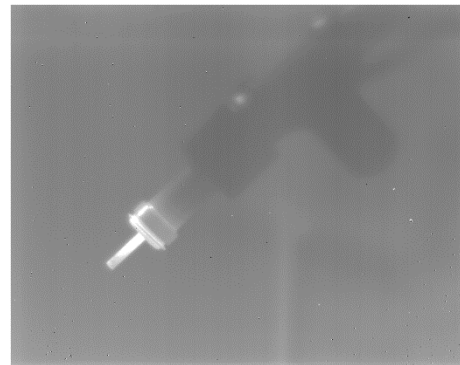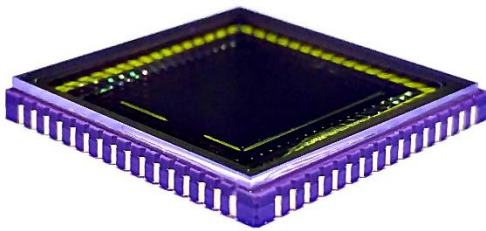

### GENERAL DESCRIPTIONS

PARAMETER	UNIT	VALUE
Sensor Technology	---	Planar InGaAs PIN
Spectral Range	$\mu\text{m}$	0.9 -1.7
Actual Pixel Array	---	640 x 512
Effective Pixel Array	---	636 x 508
Pixel Pitch	$\mu\text{m}$	15
Image Size	mm	9.6 x 7.68
Package Type	---	64-pin Ceramic LCC
Package Size L x W x T	mm	18 x 18 x 2
Weight	g	1.7



SPECIFICATIONS (T<sub>AMB</sub> = 22 °C)

Parameter	Unit	Typical Value	Conditions
<sup>1,2</sup> Dark Current	fA	≤ 30	Photopixel Biased @ -0.5 V
<sup>1,2</sup> Quantum Efficiency* Fill Factor (QE <sub>EFF</sub> )	%	≥ 70	λ = 1.0 μm - 1.6 μm
<sup>1,2</sup> Response Nonuniformity	%	≤ 5	At 50% Full Well
<sup>1,2</sup> Response Nonlinearity	%	≤ 2	15% - 85% Well Occupation Range
Charge Capacity	@ High Gain	0.043	ROIC Specifications
	@ Mid Gain	0.12	
	@ Low Gain	1.44	
Readout Noise	@ High Gain	≤ 35	ROIC Specifications
	@ Mid Gain	≤ 60	
	@ Low Gain	≤ 500	
Noise-Equivalent Irradiance (NEI)	ph#/cm <sup>2</sup> -s	≤ 2.2 x 10 <sup>9</sup>	Mid Gain, IntegrationTime = 16.7 ms,
Mean Detectivity	cm-√Hz/W	≥ 1.2 x 10 <sup>13</sup>	λ = 1.55 μm
Output Swing	V	2.25	
<sup>2</sup> Minimum Integration Period	μs	< 1	
<sup>1,2</sup> Pixel Operability	%	≥ 99.5	Percentage of Pixels with QE <sub>EFF</sub> Deviation within ±20%*(QE <sub>EFF</sub> Mean).


1. These items are defined for central effective pixel array (636x508). Their values correspond to default operation conditions.
2. Contact us for further information.

ABSOLUTE MAXIMUM RATINGS

Parameter	Unit	Min.	Max.
<sup>3</sup> Operation Temperature	°C	-40	+70
<sup>3</sup> Storage Temperature	°C	-40	+70
Power Consumption	mW	---	200

3. In non-condensing environment



PACKAGE OUTLINE (Unit: mm)

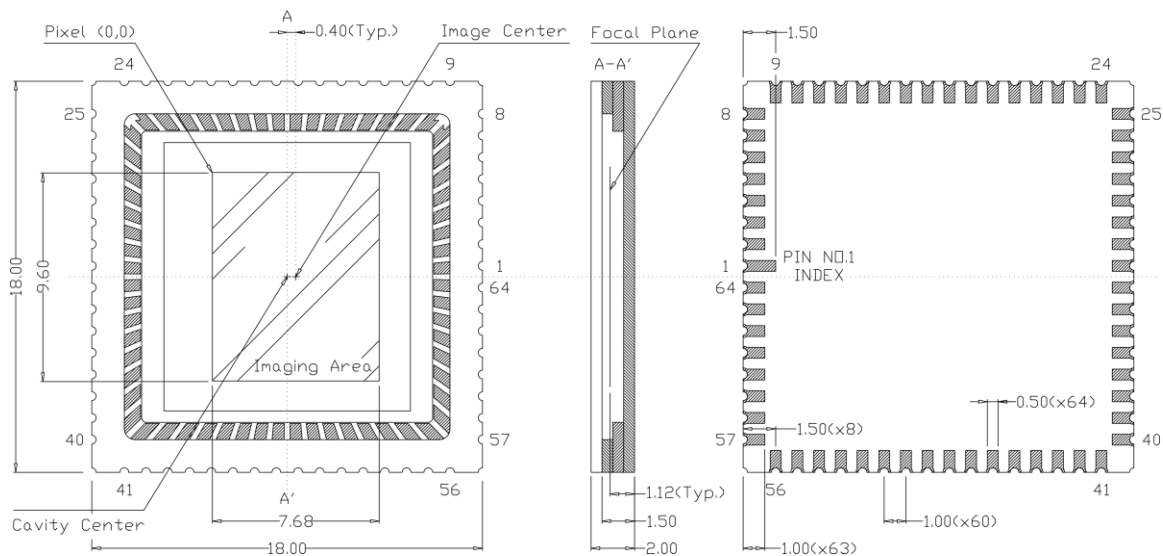





## EXAMPLE CURVES


### Histograms of Dark Condition

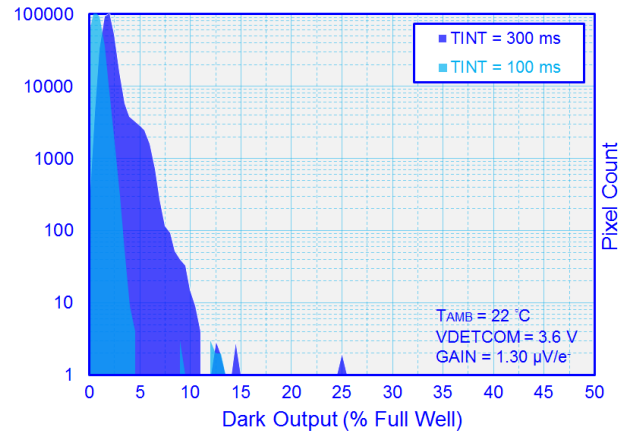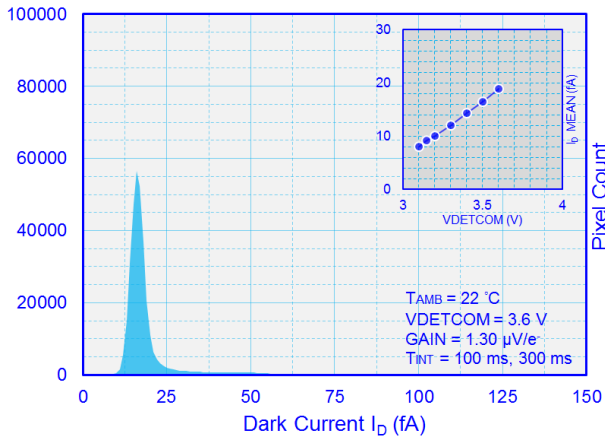


### Histograms of Illumination Condition

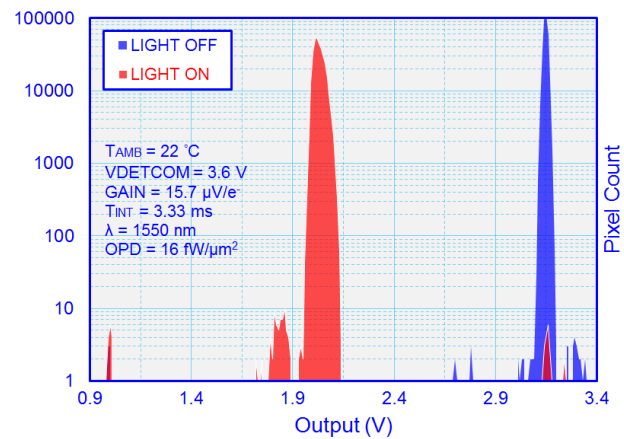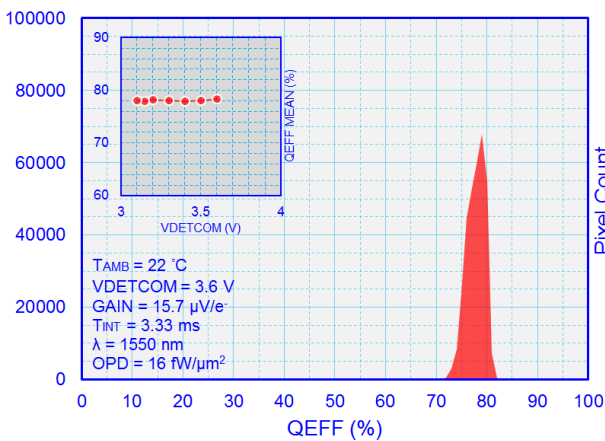

### QE FF Spectrum

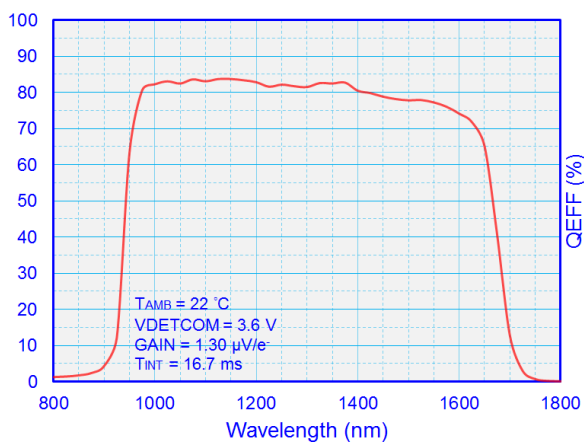

### QE FF Linearity

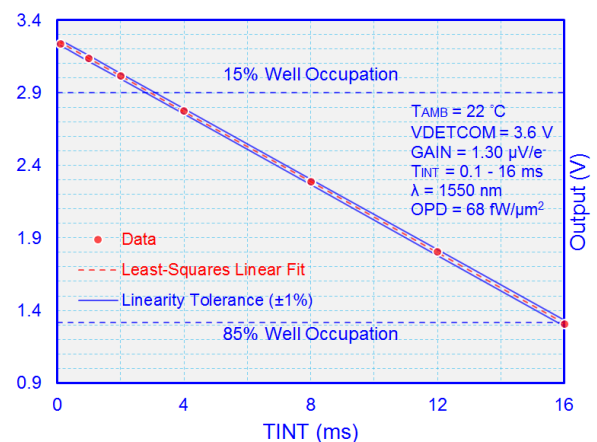

The information in this document is subject to change without notice.  
Copyright © 2018 Chungwha Leading Photonics Technology. All rights reserved.