
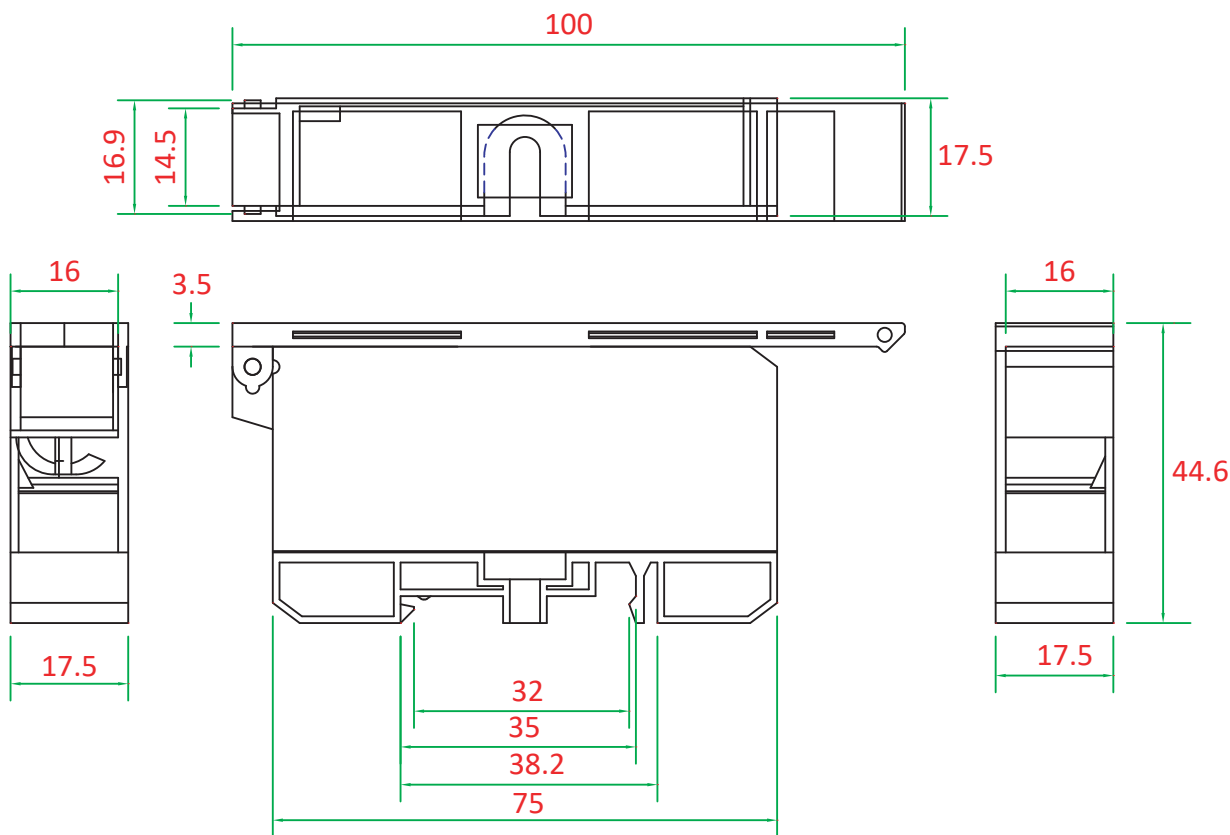
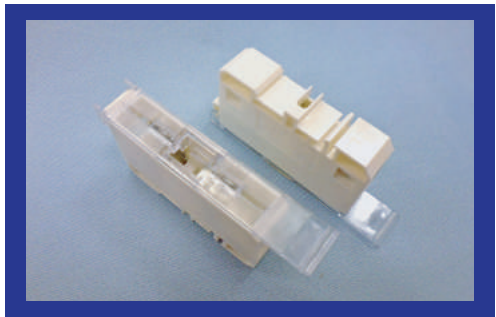
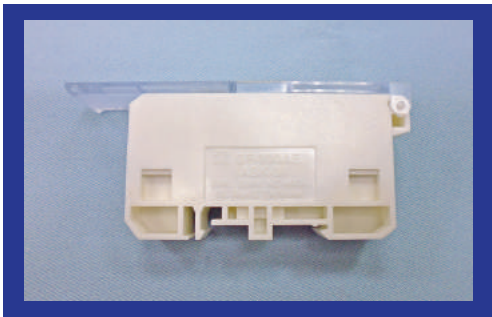


-Relay Socket Series-

S F - 3 8 0 A E

臥式保險絲座

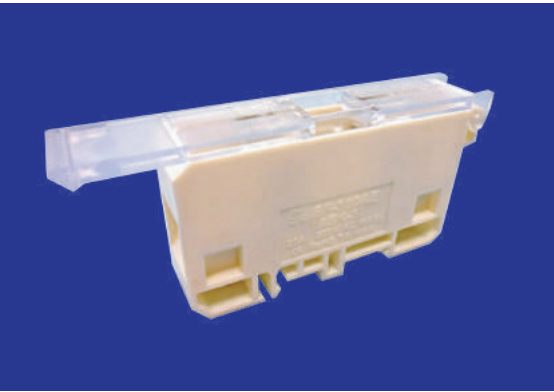

產品資訊
Products Information



一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V $\geq 500M\Omega$
接點最大負載 Maximum loads rating	額定電壓 Voltage rating →500V AC 額定電流 Current rating →20 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100°C / 212°F
燃燒性 Flammability ratings	UL-94V2

主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)	PC
導體 Conductor	磷銅 (Copper)	C5191
螺絲 Screw	螺絲 Screw	4x9x9.8
	螺帽 Nut	4mm x 7 CHQ302
	硬度 Hardness	HV 200-220

其他 / Other

重量 Weight	42 $\pm$ 2g
包裝 Packing	20 pcs per case
適用保險絲 Applicable Fuse	台灣Taiwan →10 x 38mm 國外Oversea →TFB-301
通過認證 Certification	RoHS(需訂製)