





# -Relay Socket Series-





# SG2R-8A/AE 繼電器座(露出)

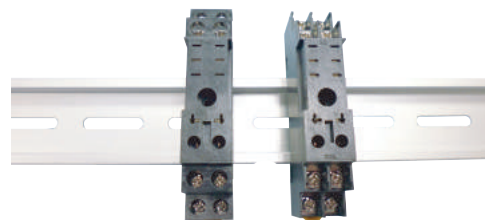

**SG2R-8A**



**SG2R-8AE**

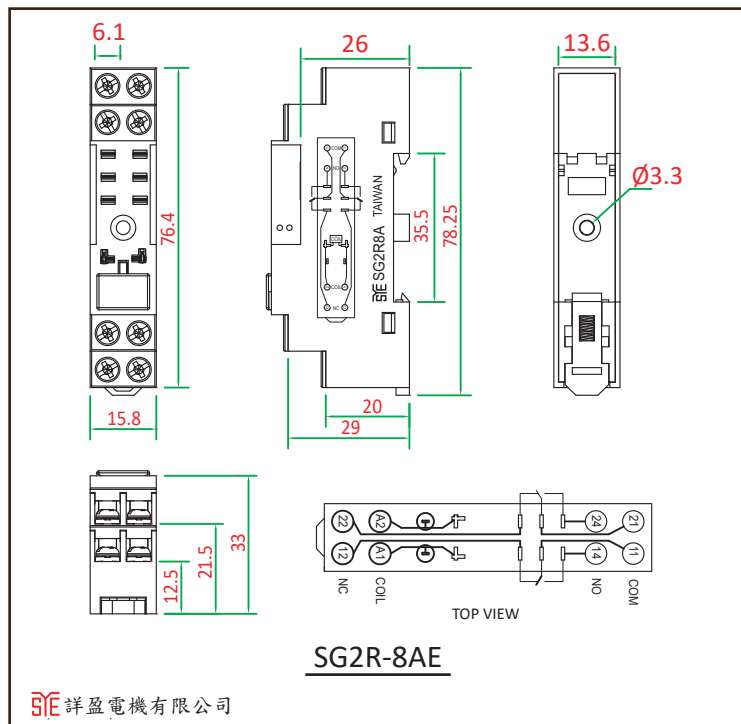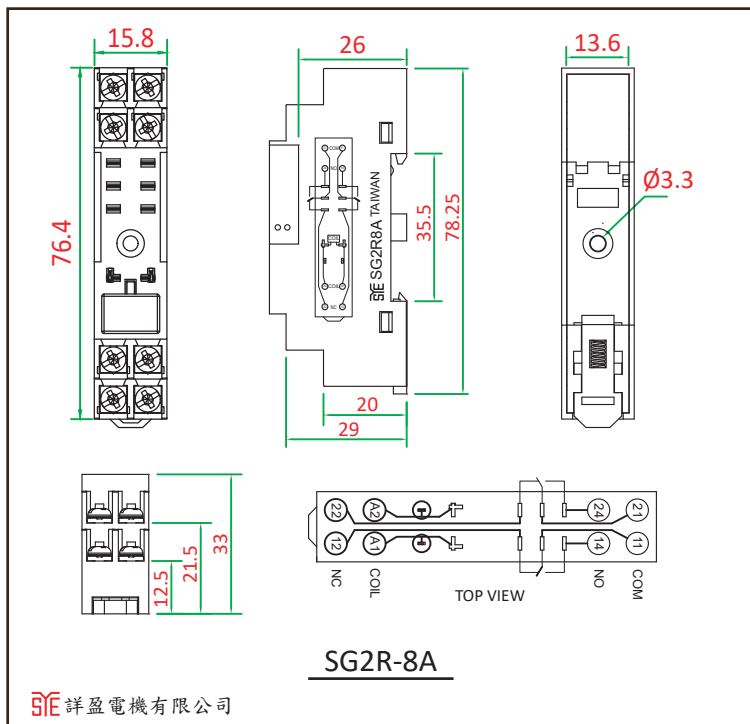

產品  
Products

資訊  
Information



## 一般特性 / General characteristics

耐壓強度 Dielectric strength	2000V/AC 1Min
絕緣強度 Insulation resistance	DC 500V $\geq 500M\Omega$
接點最大負載 Maximum loads rating	額定電壓 Voltage rating →250V AC
	額定電流 Current rating →5 Amp
熱變形溫度(HDT) Heat Deflection Temperature	100°C / 212°F
燃燒性 Flammability ratings	UL-94V2

## 主要材質 / Material

本體 Body	工業塑膠 (Industrial Plastic)	PC+GF(FRP)
	導體 Conductor	磷銅 (Phosphor bronze)
螺絲 Screw	螺絲 Screw	3x7x5.8
	螺帽 Nut	3mm x 5.5 CHQ302
	硬度 Hardness	HV 200-220

## 其他 / Other

重量 Weight	30 ± 2g (SG2R-8A)
	31 ± 2g (SG2R-8AE)
包裝 Packing	20 pcs per case
適用繼電器 Applicable Relays	台灣Taiwan → 845 2P、EMI-2P
	國外Oversea → G2R-1-SN、G2R-2-SN、 G2R-2H、40.52、44.52