




0型環系列 G規格 尺寸表 (JIS B2041)

G 3.1 系列 內徑120.02mm~659.85mm

G 5.7 系列 內徑 4.7mm~19.18mm (固定用)

材質	硬度	使用溫度	用途
NBR	70	-40°C~120°C	耐油、耐磨耗、抗老化等特性。
SI	70	-55°C~230°C	耐熱、耐寒、耐臭氧、彈性與電絕緣性能。
VT	75	-20°C~200°C	優越的耐藥品化學性、耐溶劑、耐油等特性。
EPDM	70	-40°C~150°C	耐侯、耐老化、耐臭氧、耐磨耗、防水等特性。

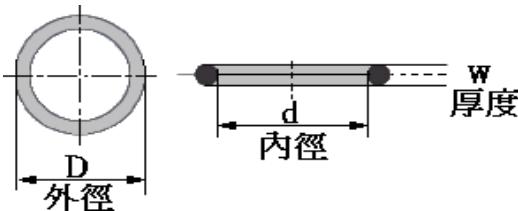

單位 : mm

0型環	內徑	外徑	厚度
G25	24.4	30.6	3.1
G30	29.4	35.6	3.1
G35	36.4	40.6	3.1
G40	39.4	45.6	3.1
G42	41.4	47.6	3.1
G45	44.4	50.6	3.1
G50	49.4	55.6	3.1
G52	51.4	57.6	3.1
G55	54.4	60.6	3.1
G58	57.4	63.6	3.1
G60	59.4	65.6	3.1
G62	61.4	67.6	3.1
G63	62.4	68.6	3.1
G64	63.4	69.6	3.1
G65	64.4	70.6	3.1
G67	66.4	72.6	3.1
G68	67.4	73.6	3.1
G70	69.4	75.6	3.1
G72	71.4	77.6	3.1
G75	74.4	80.6	3.1
G80	79.4	85.6	3.1
G85	84.4	90.6	3.1
G90	89.4	95.6	3.1
G95	94.4	100.6	3.1
G100	99.4	105.6	3.1
G105	104.4	110.6	3.1
G110	109.4	115.6	3.1
G115	114.4	120.6	3.1
G120	119.4	125.6	3.1
G125	124.4	130.6	3.1

單位 : mm

0型環	內徑	外徑	厚度
G130	129.4	135.6	3.1
G135	134.4	140.6	3.1
G140	139.4	145.6	3.1
G145	144.4	150.6	3.1
G150	149.3	160.7	5.7
G155	154.3	165.7	5.7
G160	159.3	170.7	5.7
G165	164.3	175.7	5.7
G170	169.3	180.7	5.7
G175	174.3	185.7	5.7
G180	179.3	190.7	5.7
G185	184.3	195.7	5.7
G190	189.3	200.7	5.7
G195	194.3	205.7	5.7
G200	199.3	210.7	5.7
G205	204.3	215.7	5.7
G210	209.3	220.7	5.7
G215	214.3	225.7	5.7
G220	219.3	230.7	5.7
G225	224.3	235.7	5.7
G230	229.3	240.7	5.7
G235	234.3	245.7	5.7
G240	239.3	250.7	5.7
G245	244.3	255.7	5.7
G250	249.3	260.7	5.7
G255	254.3	265.7	5.7
G260	259.3	270.7	5.7
G265	264.3	275.7	5.7
G270	269.3	280.7	5.7
G275	274.3	285.7	5.7




0型環系列 G 規格尺寸表 (JIS B2041)

G 5.7 系列內徑 279.3mm ~ 599.3mm (固定用)



材質	硬度	使用溫度	用途
NBR	70	-40°C~120°C	耐油、耐磨耗、抗老化等特性。
SI	70	-55°C~230°C	耐熱、耐寒、耐臭氧、彈性與電絕緣性能。
VT	75	-20°C~200°C	優越的耐藥品化學性、耐溶劑、耐油等特性。
EPDM	70	-40°C~150°C	耐候、耐老化、耐臭氧、耐磨耗、防水等特性。

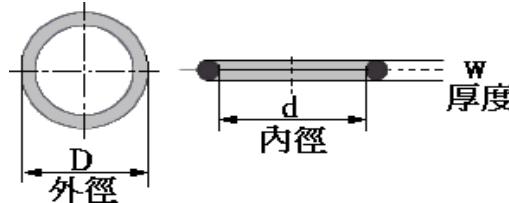

單位 : mm

0型環	內徑	外徑	厚度
G280	279.3	290.7	5.7
G285	284.3	295.7	5.7
G290	289.3	300.7	5.7
G295	294.3	305.7	5.7
G300	299.3	310.7	5.7
G305	304.3	315.7	5.7
G310	309.3	320.7	5.7
G315	314.3	325.7	5.7
G320	319.3	330.7	5.7
G325	324.3	335.7	5.7
G330	329.3	340.7	5.7
G335	334.3	345.7	5.7
G340	339.3	350.7	5.7
G345	344.3	355.7	5.7
G350	349.3	360.7	5.7
G355	354.3	365.7	5.7
G360	359.3	370.7	5.7
G365	364.3	375.7	5.7
G370	369.3	380.7	5.7
G375	374.3	385.7	5.7
G380	379.3	390.7	5.7
G385	384.3	395.7	5.7
G390	389.3	400.7	5.7
G395	394.3	405.7	5.7
G400	399.3	410.7	5.7
G405	404.3	415.7	5.7
G410	409.3	420.7	5.7
G415	414.3	425.7	5.7
G420	419.3	430.7	5.7
G425	424.3	435.7	5.7
G430	429.3	440.7	5.7
G435	434.3	445.7	5.7
G440	439.3	450.7	5.7

0型環	內徑	外徑	厚度
G445	444.3	455.7	5.7
G450	449.3	460.7	5.7
G455	454.3	465.7	5.7
G460	459.3	470.7	5.7
G465	464.3	475.7	5.7
G470	469.3	480.7	5.7
G475	474.3	485.7	5.7
G480	479.3	490.7	5.7
G485	484.3	495.7	5.7
G490	489.3	500.7	5.7
G495	494.3	505.7	5.7
G500	499.3	510.7	5.7
G505	504.3	515.7	5.7
G510	509.3	520.7	5.7
G515	514.3	525.7	5.7
G520	519.3	530.7	5.7
G525	524.3	535.7	5.7
G530	529.3	540.7	5.7
G535	534.3	545.7	5.7
G540	539.3	550.7	5.7
G545	544.3	555.7	5.7
G550	549.3	560.7	5.7
G555	554.3	565.7	5.7
G560	559.3	570.7	5.7
G565	564.3	575.7	5.7
G570	569.3	580.7	5.7
G575	574.3	585.7	5.7
G575	574.3	585.7	5.7
G580	579.3	590.7	5.7
G585	584.3	595.7	5.7
G590	589.3	600.7	5.7
G595	594.3	605.7	5.7
G600	599.3	610.7	5.7

仲合膠業有限公司 高雄市仁武區鳳仁路242號

此規格請參考、若有需要歡迎 洽詢、訂購 !!

TEL:07-371-8618

FAX:07-371-3939