



一源電梯有限公司
I YUAN ELEVATOR CO., LTD.



一源電梯有限公司
I YUAN ELEVATOR CO., LTD.

一層層的溫馨來源 —— 一源電梯

聯繫方式
CONTACT METHOD

地址：台中市太平區宜昌路74號
電話：(04) 2279-5316 傳真：(04) 2279-5317
免付費電話：0800-505316 LINE ID：@858LTDUT



各式電梯設計-製造-安裝-保養-維修



除外工程範圍

SCOPE OF EXCLUDED WORKS

建築工程

升降踏 LIFT PEDALS

1. 足夠強度之升降路，建造工程及其表面加工工程。
2. 各樓出入口門框、指示燈、按鈕等預留工程。
3. 兩台電梯並排或升降路過大時之中間工字樑設置工程。
4. 乘場出入口踏板橫樑設置工程。
5. 鋼架結構各樓間過高超出軌道強度時之中間鋼樑設置工程。
6. 鋼架結構升降路內鋼材之耐火工程及乘場入口周圍之耐火被覆工程。
7. 鋼架結構各樓出入口門框、按鈕、指示器等之鋼架或固定支架設置工程。
8. 乘場器材安裝後周圍壁面、地板之填補及粉光工程。
9. 坑底周圍之防水工程（必要時含排水設備工程）。
10. 坑底過深時之回填工程。
11. 坑底之護柵工程。（二台以上停止樓有一致時）。
12. 升降路中間有不停樓時之救出口設備工程。（非停止樓超出 10 公尺時易必要設備）
13. 屋頂陽台之乘場出入口防雨水般儲工程。
14. 升降路壁內不得設電梯以外之配管、配線等設備。
15. 樓與樓之間的垂直高度不得小於 2600 公厘。

機械室 LIFT PEDALS

1. 機械室之建造工程及出入口設備工程（必要時防噪音對策工程）
2. 機械室地板之鋼索、電纜等之預留孔工程
3. 機械室機械樑支持壁之預留孔工程。
4. 機械室機器吊梁之設置工程。
5. 採光窗之設備工程。
6. 機械室地板配管配線後之煤渣混凝土打裝及粉光工程。
7. 機械室通往室內外之樓梯（含欄杆）設置工程。
8. 機器搬入口之預留及復原工程
9. 機械室出入口鋼製門扇及加鎖工程（W1000XH2050MM 以上）
10. 機械室保養用插座設備等。
11. 機械室內不得作為通往他室之通道。

電氣設備

1. 正確之動力電源，照明電源之配管、接地線、總開關及開關箱等工程（規格容量請洽詢本公司營業員）
2. 機械室電源電壓變動率，應確保下列範圍以內值 4 之設備： 動力用 +5%，照明 +2%
3. 升降路外之監視盤、連絡裝置用之配管配線工程
4. 機械室之照明設備及保養用插座設備
5. 機械室換氣用抽風電扇或空調設備
6. 機械室煙感知器之設備
7. 停電時之緊急電源切換裝置及其識別接點供給（配管、配線）工程。
8. 機械室溫度不得超過 40C°

其他配合事項

1. 安裝工程用現場倉庫及材料堆置場之免費提供
2. 安裝工程用之試運轉、調整電力及砂石、水泥等免費提供
3. 安裝機器時確保機器搬入之路徑暢通
4. 建築工程或電器設備等，務必完全依照國內相關法規施工
5. 為維持電梯之優良性能及壽命，請注意下列條件：
濕度月平均 90% 以下，日平均 95% 以下。
升降路或機械室周圍不得有損害電梯機件或器具等之化學氣體或塵埃侵入。



牽引式別墅電梯

產品介紹 PRODUCT INTRODUCTION


- 無需傳統機房：節省建築成本
- 可根據房屋結構開門需求採用背包架式和龍門架式電梯結構
- VVVF驅動技術：家用電梯專用微機板控制，平穩舒適
- 專用牽引機機架：固定於導軌，建築物可不承受力
- It does not need a machine room. It saves the building cost.
- It applies counterlevel style and ganty styelevator stucure according to door opening requirements of the housing stncture
- WWF drive technology Home elevator dedicated micro computer-control is smooch and comfortable
- Special traction machine base frame is fixed on guiderai. The building does not bear the load



強制驅動式別墅電梯

產品介紹 PRODUCT INTRODUCTION

- 安全性高
- 鋼帶與傳動輪接觸面積大，運行更平穩
- 能耗低，環保
- 牽引輪直徑小，井道空間相對略省
- 聚氨酯材料層，無需潤滑，噪音低，壽命長
- High security
- Big contact between steel band and drive wheel with the more smooth running
- Low energy consumption, fine environment protection
It saves the well space with small diameter of traction sheave
- Polyurethane material layer needs no lubrication with low noise, and long service life



鋼索
Steel Rope





平臺式別墅梯

產品介紹 PRODUCT INTRODUCTION

- 靈活多變，多種顏色可選
- 井道佔用空間小
- 適合安裝在高檔別墅、高層複式公寓等家用環境
- Flexible and versatile, with multiple colors available
- The shaft occupies as small space
- Suitable for installation in high-end villas, High-rise duplex apartments, and other household environments



井道優選

鋼架構井架

STEEL STRUCTURE WELL FRAME

性價比高，外包板後期由裝修單位封裝與設計風格一致，安裝位置可自選，表面噴塗防銹處理，耐腐蝕。

High cost performance, and the packaging of the outer panel by the decoration in the later stage is consistent with the design style, The installation position can be selected by yourself, and the surface is sprayed with rust prevention treatment, which is corrosion resistant.

鋁合金井架

ALUMINUM ALLOY WELL FRAME

獨立的框架玻璃設計，不額外增加建築成本，透光性好，與室內裝潢融為一體；安裝位置可自選，耐腐蝕，壽命週期長，選用工業級鋁合金，玻璃採用安全夾膠玻璃。


Independent frame glass design has no extra increase of the building cost with fine light transparency. It integrates with indoor decoration into one. Installation position can be chosen by the user. It resists any corrosion with long service life. It chooses industrial-level aluminum alloy. Glass applies safety laminated glass.





框架顏色


FRAME COLOR

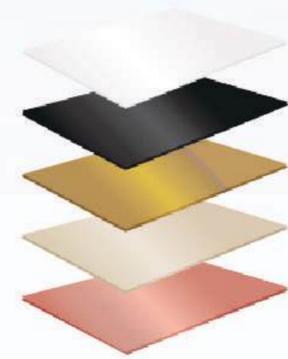

- 白色 White
- 磨砂黑 Frosted black
- 鈦金 Titanium
- 香檳金 Champagne gold
- 玫瑰金 Rose gold

玻璃顏色

GLASS COLOR



- 透明玻璃 Transparent glass
- 磨砂白玻璃 Frosted glass
- 藍星灰玻璃 Blue star gray glass
- 茶色玻璃 Brown glass

DECARATION

轎廂裝飾與設計



IY—V001 簡雅

標配 Standard

天花板：白色烤漆鋼板，鏡面不銹鋼，暗藏燈帶，LED 筒燈

轎壁：髮紋不銹鋼，白色烤漆鋼板，暗藏燈帶

扶手：無

地板：PVC

Ceiling : White baked enamel steel-plate, mirror stainless steel, hidden lamp, LED down light

Car wall : Hairline stainless steel, white baked enamel steel-plate, hidden lamp

Handrail : None

Floor : PVC



IY—V002 峰巒

選配 Optional

天花板：香檳金不銹鋼框架，亞克力透光板

轎壁：黑鈦不銹鋼，藝術玻璃，香檳金不銹鋼框架，暗藏燈帶

扶手：無


地板：PVC(大理石可選)

Ceiling : Champagne gold stainless steel frame, acrylic light-emitting panel

Car wall : Black titanium stainless steel, art glass, champagne gold stainless steel frame, hidden light strip

Handrail : None

Floor : PVC(optional marble)

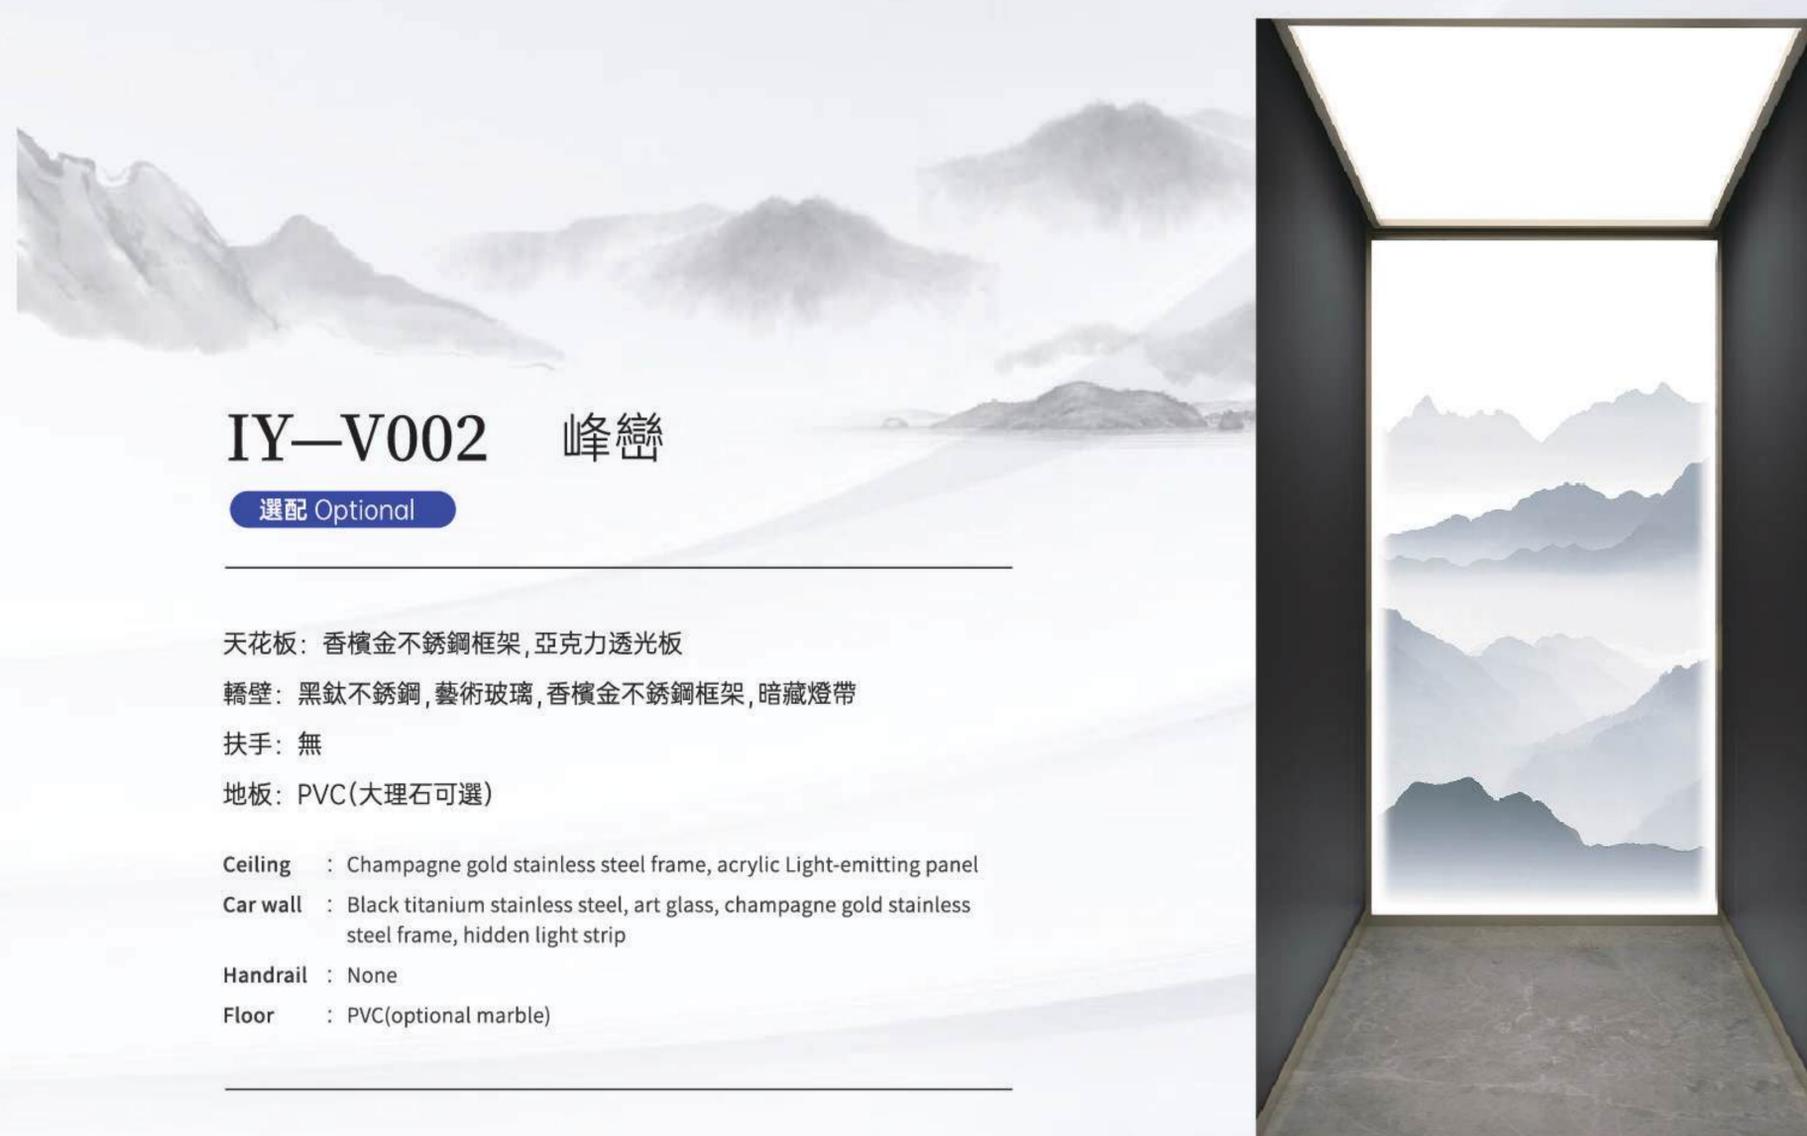



IY—V003 晨星

選配 Optional

天花板：香檳金鏡面不銹鋼，亞克力燈飾，LED 燈帶

轎壁：香檳金不銹鋼，藝術玻璃，香檳金鏡面不銹鋼，暗藏燈帶

扶手：無

地板：PVC（大理石可選）

Ceiling : Champagne gold mirror stainless steel acrylic lighting decoration
LED light strip

Car wall : Champagne gold stainless steel, art glass, champagne gold mirror
stainless steel, hidden light strip

Handrail : None

Floor : PVC(optional marble)



IY—V004 白玉

選配 Optional

天花板：烤漆鋼板，LED 筒燈，暗藏燈帶

轎壁：仿木紋裝飾板，香檳金不銹鋼，大理石岩板，暗藏燈帶

扶手：金屬扶手

地板：PVC（大理石可選）

Ceiling : Paint steel plate, LED down light, hidden lamp belt

Car wall : Wood like decorative board, marble slate, champagne gold stainless
steel, hidden lamp belt

Handrail : Metal armrest

Floor : PVC(optional marble)





IY—V005 雅蘊

選配 Optional

天花板：玫瑰金髮紋邊框，亞克力透光板

轎壁：石紋防火飾面，藝術玻璃，玫瑰金髮紋不銹鋼

扶手：玫瑰金不銹鋼圓管


地板：PVC（大理石可選）

Ceiling : Rose gold hairline frame, acrylic light-emitting panel

Car wall : Stone grain fireproof finish, art glass, rose gold hairline stainless steel

Handrail : Rose gold stainless steel round pipe

Floor : PVC(optional marble)

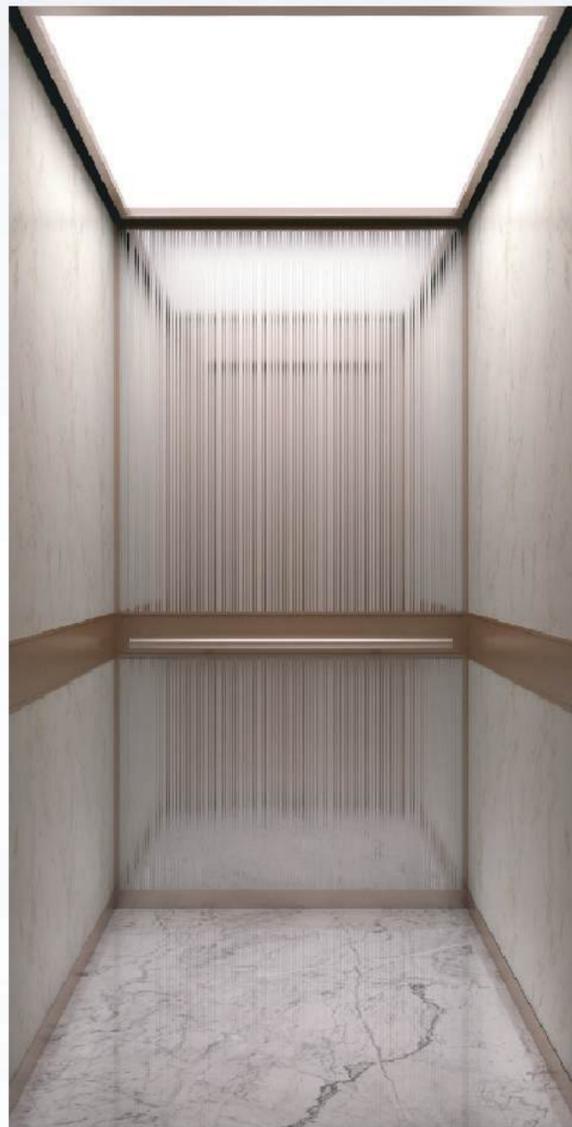

IY—V006 晏秋

選配 Optional

天花板：白色鋼板烤漆，玫瑰金鏡面不銹鋼裝飾條，暗藏燈帶，LED 筒燈

轎壁：玫瑰金鏡面不銹鋼，玫瑰金鏡面噴砂蝕刻不銹鋼

扶手：無


地板：PVC（大理石可選）

Ceiling : White baked enamel steel-plate, rose gold mirror stainless steel decorative strip, hidden light strip, LED tube light

Car wall : Rose gold mirror stainless steel, rose gold mirror sand-blasted etched stainless steel

Handrail : None

Floor : PVC(optional marble)

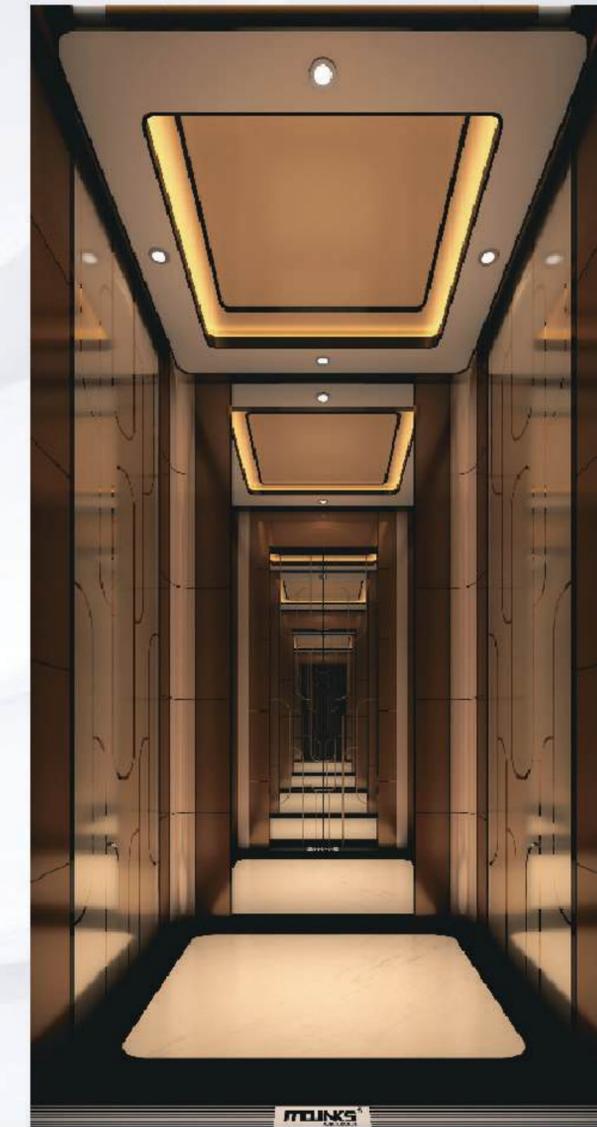



IY—V007 靜謐

選配 Optional

天花板：髮紋不銹鋼，亞克力透光板，LED 筒燈

轎壁：髮紋不銹鋼，木紋化妝鋼板

扶手：無

地板：PVC（大理石可選）

Ceiling : Hairline stainless steel, acrylic light-emitting panel, LED down light

Car wall : Hairline stainless steel, wood-grain make-up steel-plate

Handrail : None

Floor : PVC(optional marble)



IY—V008 漣漪

選配 Optional

天花板：鏡面水波紋不銹鋼，玫瑰金髮紋邊框，暗藏燈帶

轎壁：皮革硬包搭配玫瑰金裝飾條，裝飾玻璃，玫瑰金噴砂不銹鋼

扶手：無

地板：PVC（大理石可選）

Ceiling : Mirror water ripple stainless steel, rose blonde border, hidden light strip

Car wall : Leather hard bag with rose gold trim, decorative glass, rose gold sandblasted stainless steel

Handrail : None

Floor : PVC(optional marble)





IY—V009 海風

選配 Optional

天花板：玫瑰金鏡面不銹鋼，亞克力透光板

轎壁：玫瑰金髮紋不銹鋼，玫瑰金鏡面不銹鋼，玫瑰金鏡面蝕刻不銹鋼

扶手：無

地板：PVC（大理石可選）

Ceiling : Rose gold mirror stainless steel, acrylic light-emitting panel

Car wall : Rose gold hairline stainless steel, rose gold mirror stainless steel, rose gold mirror etched stainless steel

Handrail : None

Floor : PVC(optional marble)



IY—V010 芙蕖

選配 Optional

天花板：鏡面不銹鋼，亞克力透光板，LED筒燈

轎壁：鈦金髮紋不銹鋼，鏡面蝕刻不銹鋼，鏡面不銹鋼

扶手：鈦金髮紋不銹鋼扁扶手

地板：PVC（大理石可選）

Ceiling : Mirror stainless steel, acrylic light-emitting panel, LED down light

Car wall : Titanium hairline stainless steel, mirror etched stainless steel, mirror stainless steel

Handrail : Titanium hairline stainless steel flat handrail

Floor : PVC(optional marble)





IY—J001 紳士風範

標配 Standard

天花板：髮紋不銹鋼框架，亞克力燈飾

通風：軸流風扇

轎壁：髮紋不銹鋼

轎門：髮紋不銹鋼

轎底：PVC 地板

Ceiling : Hairline stainless steel frame, acrylic lighting decoration

Ventilation : Axial flow fan

Car wall : Hairline stainless steel

Car door : Hairline stainless steel

Car bottom : PVC floor



IY—J002 商務風尚

選配 Optional

天花板：髮紋不銹鋼，亞克力透光板，LED 筒燈

通風：軸流風扇

轎壁：鏡面蝕刻不銹鋼，髮紋不銹鋼

轎門：髮紋不銹鋼

轎底：PVC 拼花地板


Ceiling : Hairline stainless steel, acrylic light-emitting panel, LED down lamp

Ventilation : Axial flow fan

Car wall : Mirror etched stainless steel, hairline stainless steel

Car door : Hairline stainless steel

Car bottom : PVC parquet floor

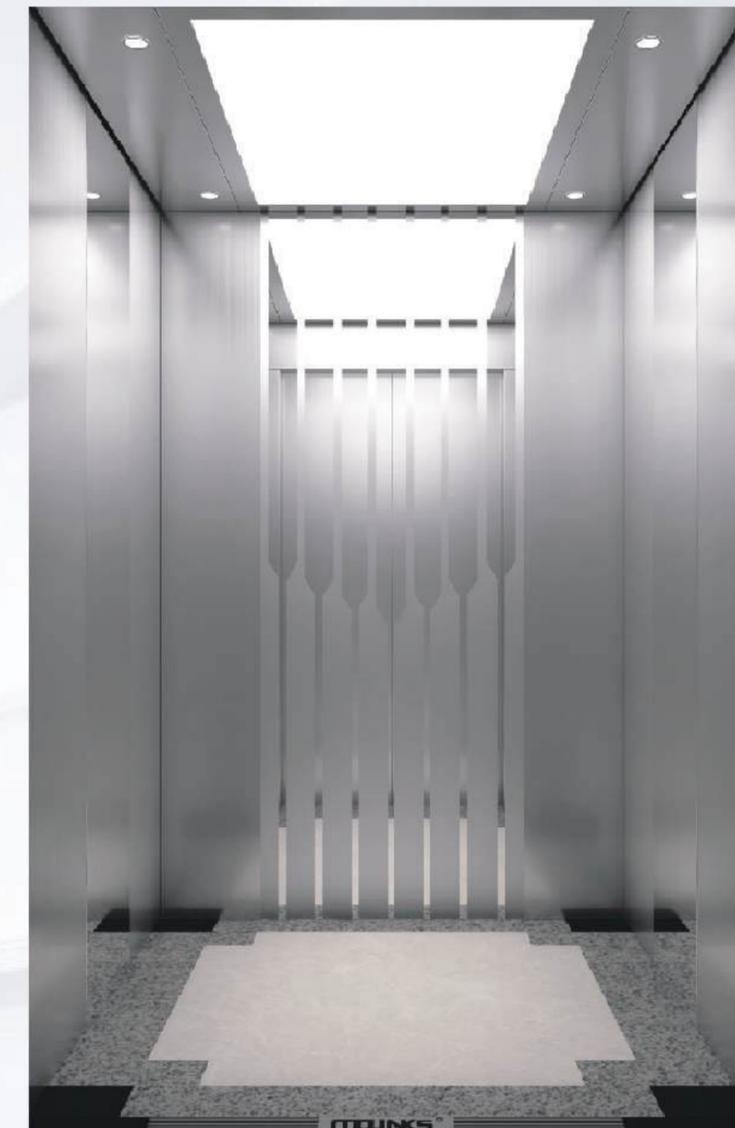



IY—J003 夏荷雅韻

選配 Optional

天花板：香檳金鏡面不銹鋼，亞克力透光板，LED 筒燈

通風：軸流風扇

轎壁：香檳金噴砂不銹鋼，香檳金鏡面不銹鋼，香檳金鏡面蝕刻不銹鋼

轎門：香檳金噴砂不銹鋼

轎底：PVC 拼花

Ceiling : Champagne gold mirror stainless steel, acrylic light-emitting panel, LED down lamp

Ventilation : Axial flow fan

Car wall : Champagne gold mirror etched stainless steel, champagne gold mirror etched stainless steel

Car door : Champagne gold sand-blasted stainless steel

Car bottom : PVC parquet



IY—J004 金粉世家

選配 Optional

天花板：鈦金鏡面不銹鋼框架，亞克力燈飾

通風：軸流風扇

轎壁：鈦金、鏡面、蝕刻、發紋、和紋

轎門：蝕刻鏡面板

轎底：PVC 拼花

Ceiling : Titanium gold mirror stainless steel frame, acrylic lighting decoration

Ventilation : Axial flow fan

Car wall : Titanium gold, mirror, etched, hairline, irregular grain

Car door : Etched mirror panel

Car bottom : PVC parquet





IY—J005 貴族雅韻

選配 Optional

天花板：玫瑰金鏡面不銹鋼框架，LED筒燈

轎壁：玫瑰金和紋不銹鋼，玫瑰鏡面蝕刻不銹鋼

扶手：玫瑰金髮紋不銹鋼圓扶手


轎底：PVC/大理石

Ceiling : Rose gold mirror stainless steel frame, LED lamp

Car wall : Rose gold irregular grain stainless steel, rose gold mirror etched stainless steel

Car door : Rose gold hairline stainless steel round handrail

Car bottom : PVC/Marble

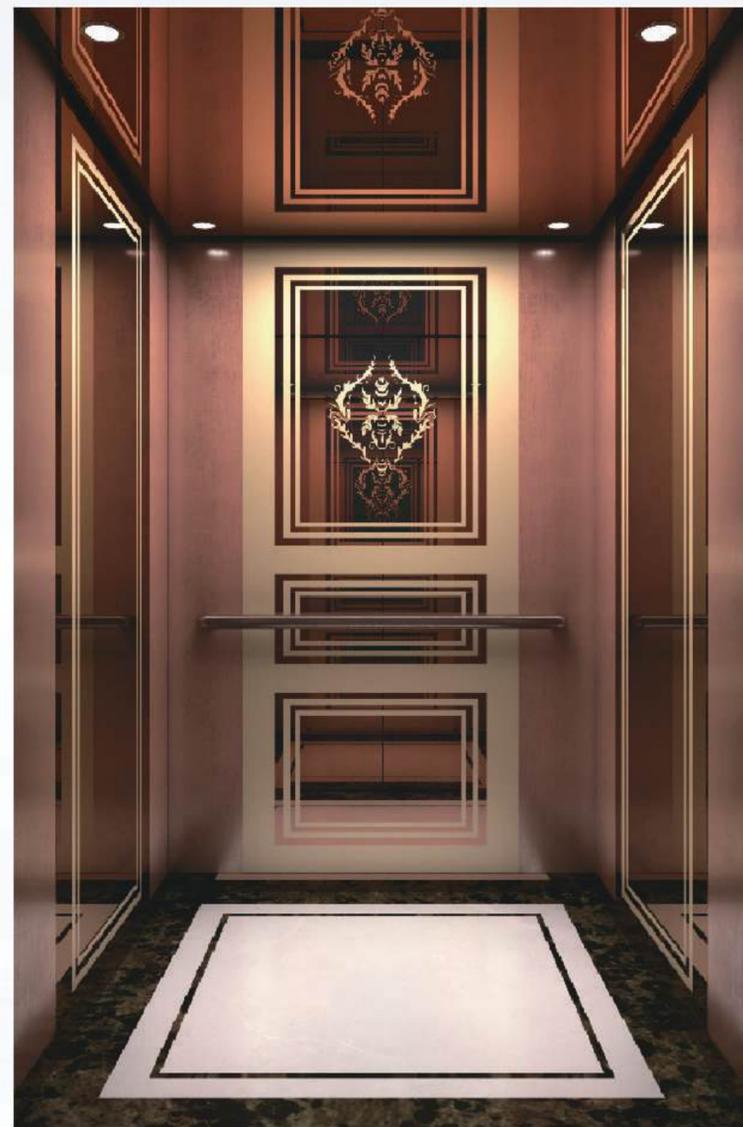

IY—J006 浮華臻品

選配 Optional

天花板：白色鋼板烤漆，銀箔裝飾頂板，暗藏燈帶，LED筒燈

轎壁：古銅鏡面噴砂蝕刻不銹鋼，古銅鏡面不銹鋼

扶手：古銅髮紋不銹鋼扁扶手


轎底：大理石拼花

Ceiling : White steel plate baked enamel, silver foil decoration top panel, hidden light band, LED down lamp

Car wall : Bronze mirror sand-blasted etched stainless steel, bronze mirror stainless steel

Car door : Bronze hairline stainless steel flat handrail

Car bottom : Marble parquet

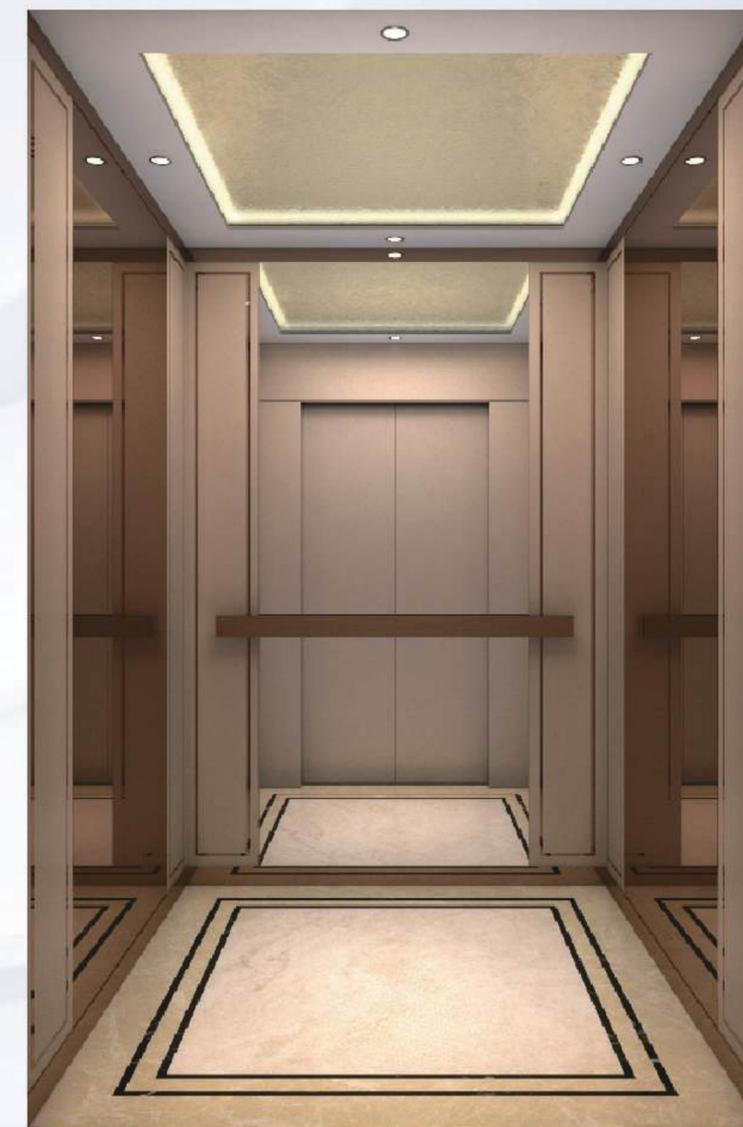



IY—V011 銀裝

選配 Optional

天花板：髮紋不銹鋼邊框，星空頂

轎壁：髮紋不銹鋼邊框，夾膠玻璃

扶手：無

地板：PVC（大理石可選）

Ceiling : Hairline stainless steel frame, starry zenith

Car wall : Hairline stainless steel frame, starry glass

Handrail : None

Floor : PVC(optional marble)



IY—V012 紅妝

選配 Optional

天花板：玫瑰金不銹鋼，暗藏光源，LED 筒燈

轎壁：玫瑰金鋁型材邊框，夾膠玻璃

扶手：無

地板：PVC（大理石可選）

Ceiling : Rose gold stainless steel, hidden light source, LED down light

Car wall : Rose gold aluminum profile frame, laminated glass

Handrail : None

Floor : PVC(optional marble)





IY—HC03 旁開式

標配 Standard

天花板：噴塗鋼板

轎壁 / 轎門：噴塗鋼板

照明：節能燈

開門方式：旁開式

地板：花紋鋼板

地坎：鋼板折彎，≥5T 為鑄鐵

Ceiling	:	Paint steel
Car wall/Car door	:	Paint steel
Lighting	:	Energy-saving lamp
Door opening mode	:	Side opening
Flooring	:	Checkered steel plate
Sill	:	Steel plate bending, ≥5T is cast iron



IY—HC04 中分雙折式

選配 Optional

天花板：髮紋不銹鋼

轎壁 / 轎門：髮紋不銹鋼

照明：節能燈

開門方式：中分雙折式

地板：花紋鋼板

地坎：鋼板折彎，≥5T 為鑄鐵

Ceiling	:	Hairline stainless steel
Car wall/Car door	:	Hairline stainless steel
Lighting	:	Energy-saving lamp
Door opening mode	:	Center opening double-folded type
Flooring	:	Checkered steel plate
Sill	:	Steel plate bending, ≥5T is cast iron





IY—G001

標配 Standard

上下罩：乳白色亞克力裝飾

觀光壁：安全夾膠玻璃

裝飾頂：鋼板烤漆框架，寶藍色亞克力燈片

轎壁：髮紋不銹鋼操縱壁及前壁立柱

扶手：不銹鋼管

轎底：PVC地板

Upper and lower guard : White acrylic decoration hood

Observation wall : Laminated safety glass

Decoration roof : Baked enamel steel plate frame, navy blue acrylic light film

Car wall : Hairline stainless steel operation wall, vertical column of front wall

Handrail : Stainless steel tube

Floor : PVC



IY—G003

選配 Optional

上下罩：烤漆鋼板，乳白色亞克力

觀光壁：安全夾膠玻璃

裝飾頂：鏡面不銹鋼框架，乳白色亞克力，兩側筒燈

轎壁：鏡面不銹鋼和夾膠玻璃組合

扶手：不銹鋼管圓管扶手

轎底：PVC地板

Upper and lower guard : Baked enamel steel, milky white acrylic decoration

Observation wall : Laminated safety glass


Decoration roof : Mirror stainless steel framework, milky white acrylic decoration, down lamp on the sides

Car wall : Combination of mirror stainless steel and laminated glass

Handrail : Stainless steel round tube handrail

Floor : PVC





IY—G005

選配 Optional

上下罩：噴塗鋼板，乳白色亞克力罩，亞克力燈飾

觀光壁：安全夾膠玻璃

裝飾頂：髮紋不銹鋼，亞克力燈飾

轎壁：髮紋不銹鋼

扶手：不銹鋼管

轎底：PVC

Upper and lower guard : Painted steel, milky white acrylic cover


Observation wall : Laminated safety glass

Decoration roof : Hairline stainless steel, acrylic lighting decoration

Car wall : Hairline stainless steel

Handrail : Stainless Steel tube

Floor : PVC



IY—G006

選配 Optional

上下罩：烤漆鋼板，上下帶弧形圍坎

觀光壁：分體透明夾膠玻璃，無裝飾立柱

裝飾頂：前部玻璃，後部鏡面不銹鋼框架，條形亞克力燈飾

轎壁：髮紋不銹鋼和夾膠玻璃組合

扶手：鏡面不銹鋼圓管扶手

轎底：PVC地板

Upper and lower guard : Baked enamel plate, up /down arc sill

Observation wall : Detached transparent laminated glass, no decorative vertical column

Decoration roof : Front glass, rear mirror stainless steel frame, strip acrylic lighting decoration

Car wall : Hairline stainless steel and laminated glass combinations

Handrail : Mirror stainless steel round tube handrail

Floor : PVC





IY—G007

標配 Standard

上下圍：鍍鋅鋼板

觀光壁：夾層安全玻璃

裝飾頂：髮紋不銹鋼，亞克力燈飾

轎廂壁：髮紋不銹鋼

扶手：不銹鋼單管

地板：PVC

Upper and lower enclosures : Galvanized steel sheet

Sightseeing wall : Laminated safety glass

Decorative ceiling : Hairline stainless steel, Acrylic lighting

Car wall : Hairline stainless steel

Handrail : Stainless steel single tube

Floor : PVC



IY—G017

標配 Standard

上下圍：噴塗鋼板

觀光壁：安全夾膠玻璃

裝飾頂：髮紋不銹鋼，亞克力燈飾

轎廂壁：髮紋不銹鋼

扶手：不銹鋼三聯管

地板：PVC

Upper and lower enclosures : Sprayed steel plate

Sightseeing wall : Safety laminated glass

Decorative ceiling : Hairline stainless steel, acrylic lighting

Car wall : Hairline stainless steel

Handrail : Stainless steel triple tube

Floor : PVC





天花板系列



IY-VM01
選配 Optional



IY-VM02
選配 Optional



IY-D001
標配 Standard



IY-D002
選配 Optional




IY-VM03
選配 Optional



IY-VM04
選配 Optional



IY-D003
選配 Optional

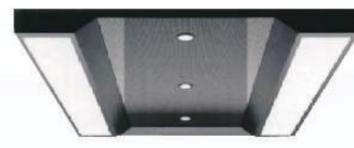

IY-D004
選配 Optional



IY-VM05
選配 Optional



IY-VM06
選配 Optional



IY-D005
選配 Optional



IY-D006
選配 Optional



扶手系列



IY-F01
選配 Optional



IY-F02
選配 Optional



IY-F04
選配 Optional



IY-F05
選配 Optional



IY-F03



IY-F06
選配 Optional



IY-VF01
選配 Optional



IY-VF02
選配 Optional



IY-VF03
選配 Optional



IY-VF04
選配 Optional



客梯外門系列


不同材質匹配多樣的紋理裝飾
為建築裝潢增彩，打開一扇門，打開美好




IY-VM01
選配 Optional



IY-VM02
選配 Optional

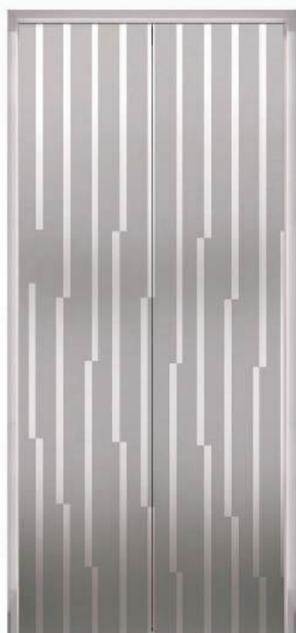

IY-VM03
選配 Optional

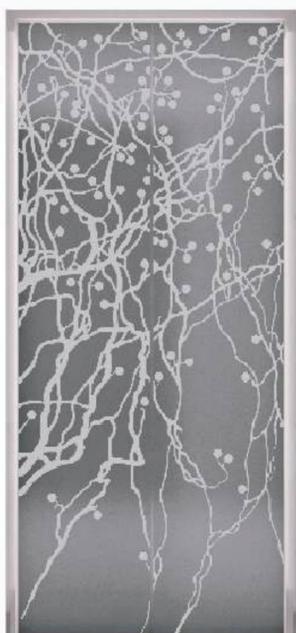

IY-VM04
選配 Optional



IY-VM05
選配 Optional



IY-VM06
選配 Optional



IY-VM07
選配 Optional



IY-VM08
選配 Optional



IY-VM09
選配 Optional



IY-VM10
選配 Optional



FLOOR 地板系列



IY-M001
標配 Standard



IY-M002
選配 Optional




IY-M003
選配 Optional



IY-M004
選配 Optional




IY-M005
選配 Optional

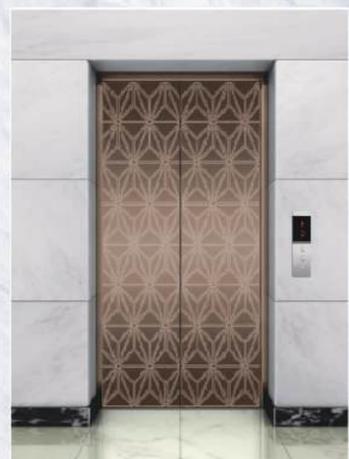


IY-M006
選配 Optional



IY-VB01
選配 Optional



IY-VB02
選配 Optional



IY-VB03
選配 Optional




IY-VB04
選配 Optional



IY-VB05
選配 Optional



IY-DB001
標配 Optional



IY-DB002
選配 Optional



IY-DB003
選配 Optional



IY-DB004
選配 Optional



IY-DB005
選配 Optional



多彩背景牆風格

轎壁款

CAR WALL STYLE



白玉映沙



雲母螢石



流緒微夢



鶴喚華亭



賀瑞青花



萬紫千紅

轎廂款

CAR STYLE

為您精心挑選時尚背景牆
加以光影效果，兼具美學與適配性

Choices selection of popular background walls with light & shadow effects are compatible to nice aesthetics and adapt ability



開門方式

DOOR OPENING TYPE

為您精心挑選時尚背景牆
加以光影效果，兼具美學與適配性

Tailor-made hoist-way door and opening mode as per requirements
It shows more of human-centered design considerations



单扇平开门
Single doors

中分平开门
Double doors



貨梯外門系列



IY-HTM01 旁開式
Side openin



IY-HTM02 中分式兩扇門
2-panels center opening



IY-HTM03 中分雙折式
Center opening double-folded type




IY-HTM04 中分三折式
3-Folded center opening tpe

轎廂防撞條 CRASH BARRIER OF ELEVATOR




木質
Wooden

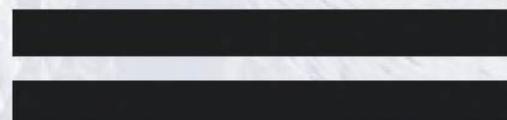


黑色橡膠
Black rubber



控制系統

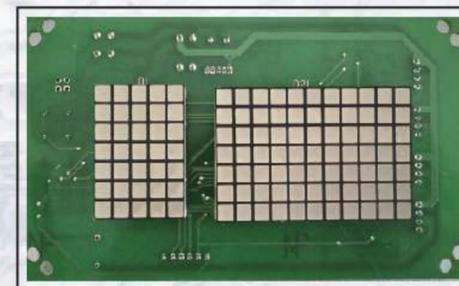

CARDIS PLAY



CALLER




HMI



CARKEY



CONTROL SYSTEM



MAIN



CAR




POWER

控制面板



牽引式別墅電梯尺寸圖

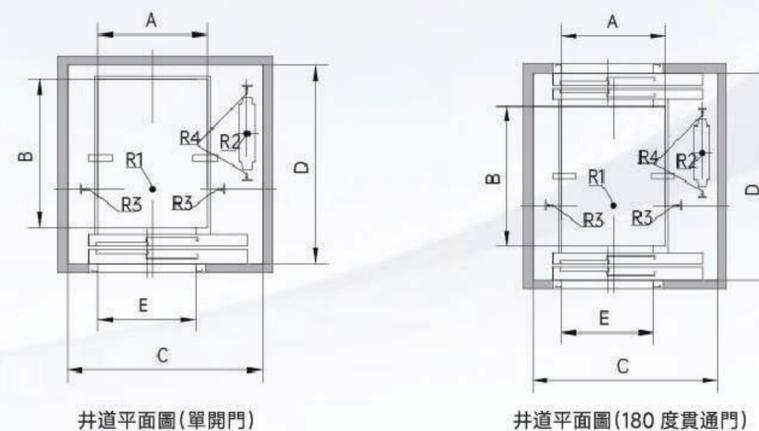

井道平面圖(單開門)

井道平面圖(180度貫通門)

單開門 SINGLE DOOR

載重	額定速度	轿廂尺寸	開門尺寸	井道尺寸	底坑深度	頂層高度
320kg	0.4m/s	1000mm×1100mm	700mm×2100mm	1600mm×1400mm	500mm	3200mm
400kg	0.4m/s	1200mm×1200mm	800mm×2100mm	1800mm×1500mm	500mm	3200mm

手拉門 HAND SLIDING DOORS

載重	額定速度	轿廂尺寸	開門尺寸	井道尺寸	底坑深度	頂層高度
320kg	0.3m/s	1000mm×1100mm	700mm×2100mm	1600mm×1250mm	500mm	3200mm
400kg	0.3m/s	1200mm×1200mm	800mm×2100mm	1800mm×1350mm	500mm	3200mm


注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準

井道立面圖(對重側置)





強制式驅動別墅電梯尺寸圖

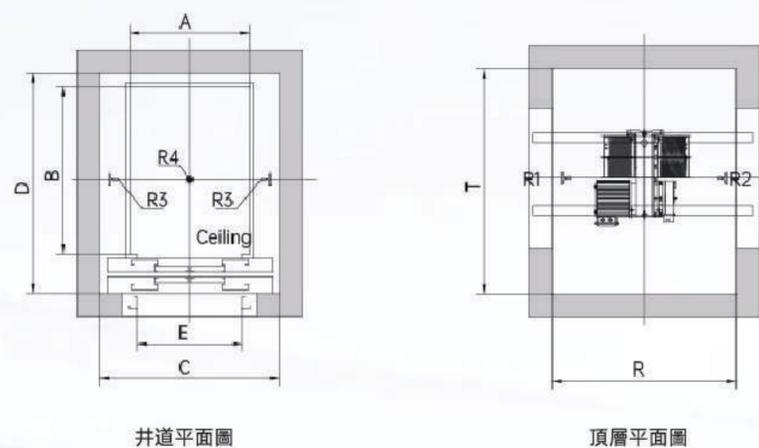


單開門 SINGLE DOOR

載重	額定速度	轿廂尺寸	開門尺寸	井道尺寸	底坑深度	頂層高度
320kg	0.3m/s	1000mm×1000mm	700mm×2100mm	1550mm×1300mm	500mm	3600mm
400kg	0.3m/s	1100mm×1100mm	700mm×2100mm	1550mm×1400mm	500mm	3600mm

手拉門 HAND SLIDING DOORS



載重	額定速度	轿廂尺寸	開門尺寸	井道尺寸	底坑深度	頂層高度
320kg	0.3m/s	1000mm×1000mm	700mm×2100mm	1400mm×1150mm	500mm	3600mm
400kg	0.3m/s	1100mm×1100mm	700mm×2100mm	1500mm×1250mm	500mm	3600mm

注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準

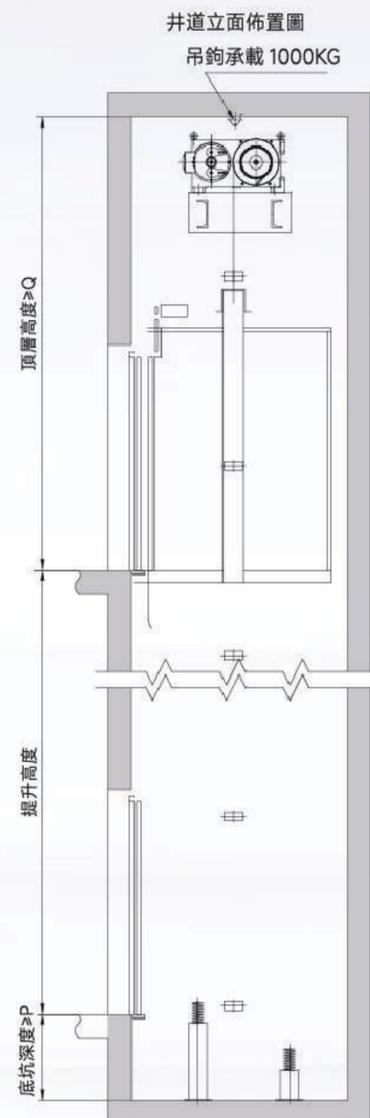

平臺別墅電梯尺寸圖



平面佈置圖



電梯預留尺寸	平台尺寸	載重量	轿廂高度	頂層高度	底坑深度
1150mm×1400mm	1000mm×1000mm	320kg	2100mm	2850mm	150mm
1400mm×1600mm	1250mm×1200mm	400kg	2100mm	2850mm	150mm


井道預留尺寸	平台尺寸	載重量	轿廂高度	頂層高度	底坑深度
1150mm×1300mm	1000mm×850mm	320kg	2100mm	2900mm	150mm
1350mm×1650mm	1200mm×1200mm	400kg	2100mm	2900mm	150mm

注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準

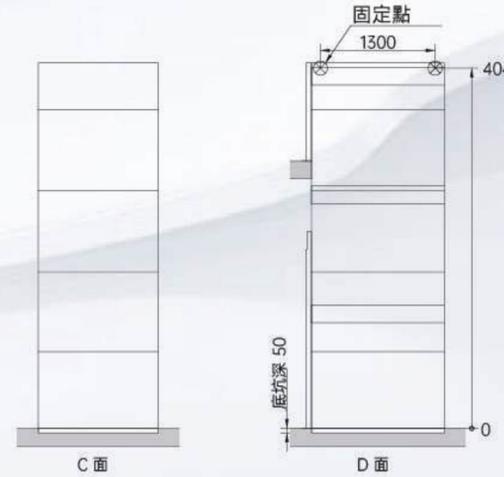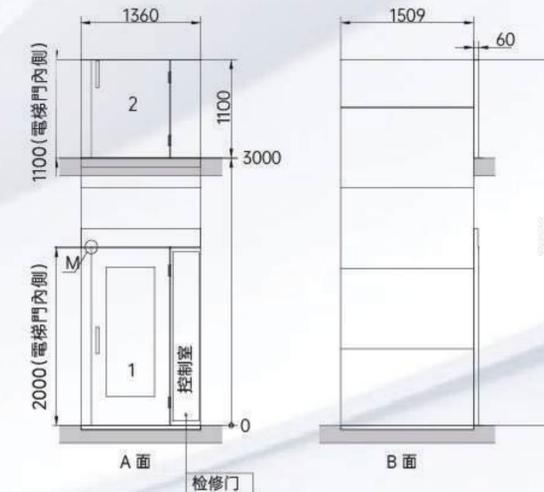



小機房電梯尺寸圖

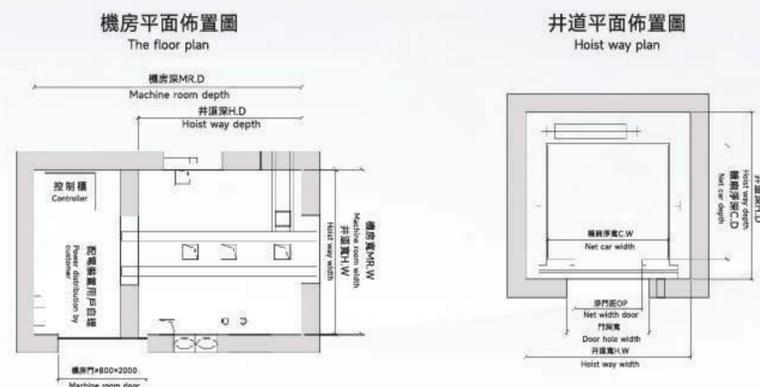

用戶應完成工作 THE USER'S TASKS

- 1.本圖按有關電梯技術標準要求繪製，需方複核后作為電梯安裝依據。
- 2.機房內通向井道的所有孔洞四周應築一高50MM以上，寬度適當的台階。
- 3.安裝完成后，地面裝飾應與外門地坎上表面有一高度適當的台階，以防止水或其他雜物進入井道。
- 4.安裝時澆灌的物體應能滿足相關的圖示要求。
- 5.緩衝器底座製作時應在安裝人員的指導下施工。

- 1.It makes the drawing according to the relevant lift technical standard. It needs to be checked and confirmed by the user before it becomes the lift installation proof.
- 2.It shall have one above 50mm step with the pope width around the holes that lead to the well in side the machine room.
- 3.After the installation completion, the ground decoration shall have a proper height step in the sill surface to prevent water or other impurity from entering into the well.
- 4.The casting object in the installation shall satisfy the relevant drawing requirements.
- 5.The buffer base shall be made under the directions of the installers.



小機房電梯尺寸表 SMALL MACHINE ROOM ELEVATOR SPECIFICATIONS


載重 KG	速度 m/s	轿廂尺寸mm			開門尺寸mm		井道尺寸mm				K-頂層	S-底坑	最大層站	最大提升高度m	機房淨寬 MRW	機房淨深 MRDmm	機房淨高 MRHmm
		CW-寬	CD-深	CH-高	OP-寬	OPH-高	HW-寬-Min	HW-寬-Max	HD-深-Min	HD-深-Max							
630	1	1100	1400	2500	800	2100	1850	1950	1700	1800	4500	1500	15	50	1800	2100	2500
	1.5										4600	1600	24	75			
	1.75										4700	1700	30	90			
800	1	1400	1350	2500	800	2100	1900	2200	1850	1950	4500	1500	15	50	1900	2000	2500
	1.5										4600	1600	24	75			
	1.75										4700	1700	30	90			
	2										4900	1800	35	110			
	2.5										5100	2000	40	130			
1000	1	1600	1400	2500	900	2100	2100	2250	1900	2000	4500	1500	15	50	2100	2100	2500
	1.5										4600	1600	24	75			
	1.75										4700	1700	30	90			
	2										4900	1800	35	110			
	2.5										5100	2000	40	130			
1150	1	1800	1500	2500	1100	2100	2300	2650	2050	2150	4500	1500	15	50	2400	2200	2500
	1.5										4600	1600	24	75			
	1.75										4700	1700	30	90			
	2										4900	1800	35	110			
	2.5										5100	2000	40	130			
1350	1	2000	1500	2500	1100	2100	2500	2800	2100	2200	4500	1500	15	50	2500	2200	2500
	1.5										4600	1600	24	75			
	1.75										4700	1700	30	90			
	2										4900	1800	35	110			
	2.5										5100	2000	40	130			
1600	1	2000	1700	2500	1100	2100	2500	3000	2200	2200	4500	1500	15	50	2500	2400	2500
	1.5										4600	1600	24	75			
	1.75										4700	1700	30	90			
	2										4900	1800	35	110			
	2.5										5100	2000	40	130			
2000	1	2200	1800	2500	12200	2100	2700	2800	2550	2600	4500	1500	15	50	2500	2400	2500
	1.5										4600	1600	24	75			
	1.75										4700	1700	30	90			
	2										4900	1800	35	110			
	2.5										5100	2000	40	130			

注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準。
 Note: Only for reference, final manufacture please follow contract.




無機房電梯尺寸圖

機房平面佈置圖
The floor plan



井道平面佈置圖
Hoist way plan




用戶應完成工作 THE USER'S TASKS

- 1.本圖按有關電梯技術標準要求繪製，需方複核后作為電梯安裝依據。
- 2.機房內通向井道的所有孔洞四周應筑一高50MM以上，寬度適當的台階。
- 3.安裝完成后，地面裝飾應與外門地坎上表面有一高度適當的台階，以防止水或其他雜物進入井道。
- 4.安裝時澆灌的物體應滿足相關的圖示要求。
- 5.緩衝器底座製作時應在安裝人員的指導下施工。

- 1.It makes the drawing according to the relevant lift technical standard. It needs to be checked and confirmed by the user before it becomes the lift installation proof.
- 2.It shall have one above 50mm step with the pope width around the holes that lead to the well in side the machine room.
- 3.After the installation completion, the ground decoration shall have a proper height step in the sill surface to prevent water or other impurity from entering into the well.
- 4.The casting object in the installation shall satisfy the relevant drawing requirements.
- 5.The buffer base shall be made under the directions of the installers.

井道立面圖

Hoist way elevation

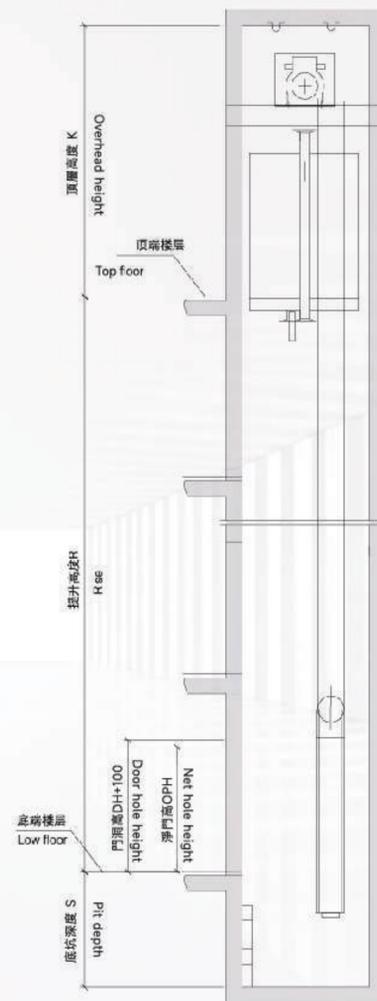



無機房電梯尺寸表 MACHINE ROOM-LESS ELEVATOR PARAMETER TABLE

載重量 (人數) Loading capacity (Passengers)	630kg (8人 Passengges)			800kg (10人 Passengges)			1000kg (13人 Passengges)			1150kg (15人 Passengges)			1350kg (18人 Passengges)			1600kg (20人 Passengges)			2000kg (28人 Passengges)			
	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	
額定速度 (M/S) Rated speed	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	1.0	1.5	1.75	
開門尺寸 (MM) Door opening size	800			800			900			900			1100			1100			1200			
轎廂尺寸 (MM) Car size	寬 Width	1100			1400			1600			1700			2000			2000			1600		
	深 Depth	1400			1350			1400			1500			1500			1700			2500		
	高 Height	2500			2500			2500			2500			2500			2500			2500		
井道尺寸 (MM) Hoist way size	寬 Width	1950			2150			2350			2550			2900			2950			3000		
	深 Depth	1800			1950			2000			2050			2050			2150			2900		
頂層高度 Top floor height(mm)	4500	4600	4700	4500	4600	4700	4500	4600	4700	4500	4600	4700	4500	4600	4700	4500	4600	4700	4500	4600	4700	
底坑深度 Pit depth(mm)	1500	1600	1700	1500	1600	1700	1500	1600	1700	1500	1600	1700	1500	1600	1700	1500	1600	1700	1500	1600	1700	
最大提升高度 Max travelling height(mm)	45	70	80	45	70	80	45	70	80	45	70	80	45	70	80	45	70	80	45	70	80	


注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準。更大載重貨梯規劃請洽本公司服務電話。
Note: Only for reference, final manufacture please follow contract. Please contact the company's service number for larger freight elevator.



載貨電梯尺寸圖

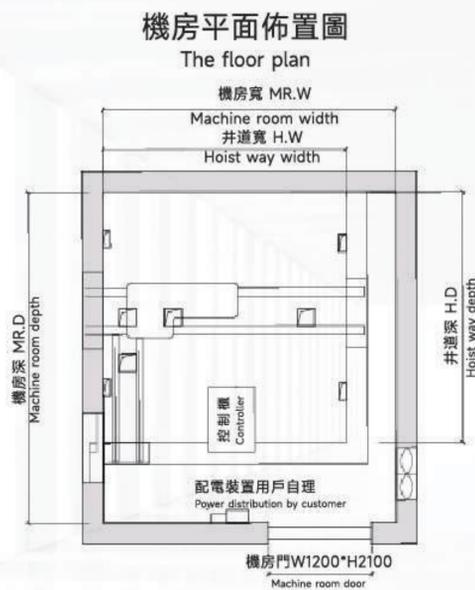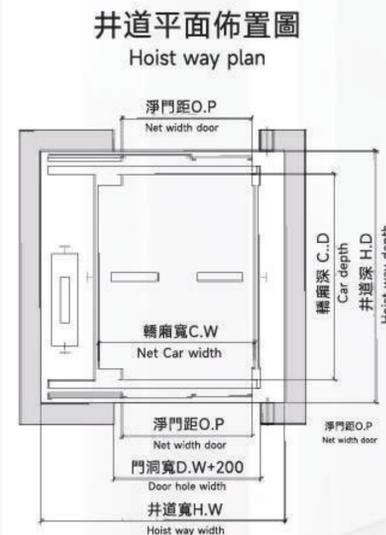

井道立面圖
井道立面圖
Hoist way elevation

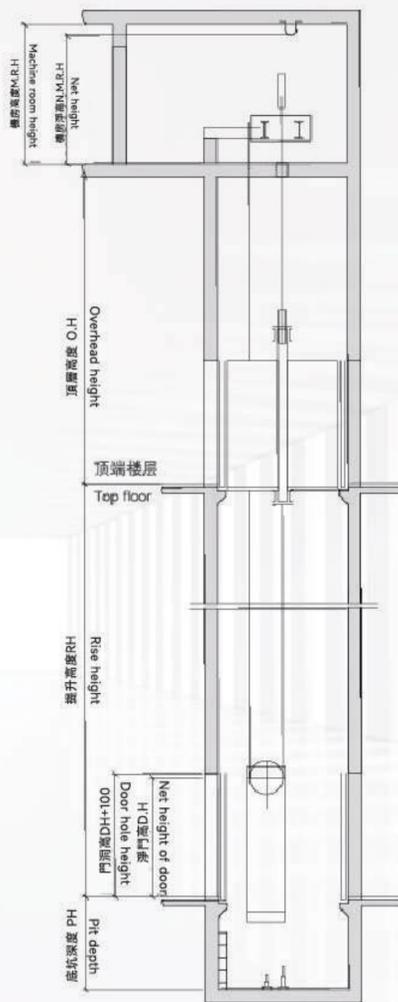

載貨電梯尺寸表 FREIGHT ELEVATOR SPECIFICATIONS


載重量DL Loading capacity(kg)	1000	1600	2000	3000	4000	5000								
額定速度 Rate speed(m/s)	0.5/1.0	0.5/1.0	0.5/1.0	0.5/1.0	0.25/0.5/1.0	0.25/0.5/1.0								
開門尺寸 (mm) Door opening size	旁開雙折 1200*2100		旁開雙折 1400*2100		中分雙折 1500*2100	旁開雙折 1500*2100	中分雙折 1800*2100	中分雙折 2200*2300	中分雙折 2400*2300					
出入口 (mm) Exit and entrance	單通	貫通	單通	貫通	單通	貫通	單通	貫通	單通	貫通	單通	貫通	單通	貫通
轿厢尺寸 (mm) Car size	寬CW	1400	1600	1900	1900	2230	2200	2400						
	深CD	1700	2200	2200	2200	2600	3300	3600						
	高CH	2200						2400						
井道尺寸 (mm) Hoist way size	寬HW	2300	2600/2700	2900/3000	2850/2950	3400	3750	4000						
	深HD	2220	2720	2720	2720	3120	3820	4120						
機房尺寸 (mm) Machine room size	寬MRW	3500		3400		3750	4000							
	深MRD	3500	4000		4500		4120							
	高MRH	2800												
頂層高度OH			4500				5100							
底坑深度PH			1500				1700							
最大提升高度RH	30													

注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準。
Note: Only for reference, final manufacture please follow contract.




無機房載貨電梯尺寸圖


井道頂部平面佈置圖 Hoist way elevation

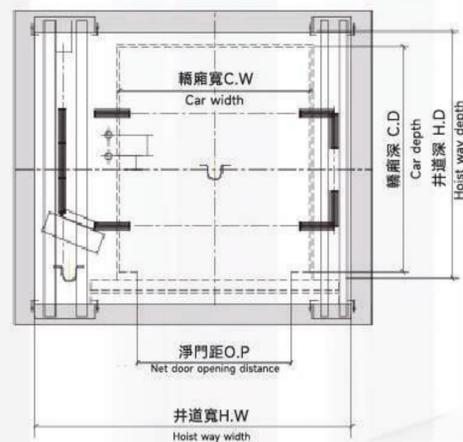

井道平面佈置圖 Hoist way plan

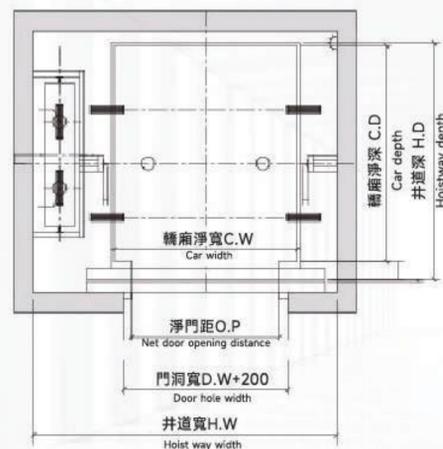

井道立面圖 Hoist way elevation

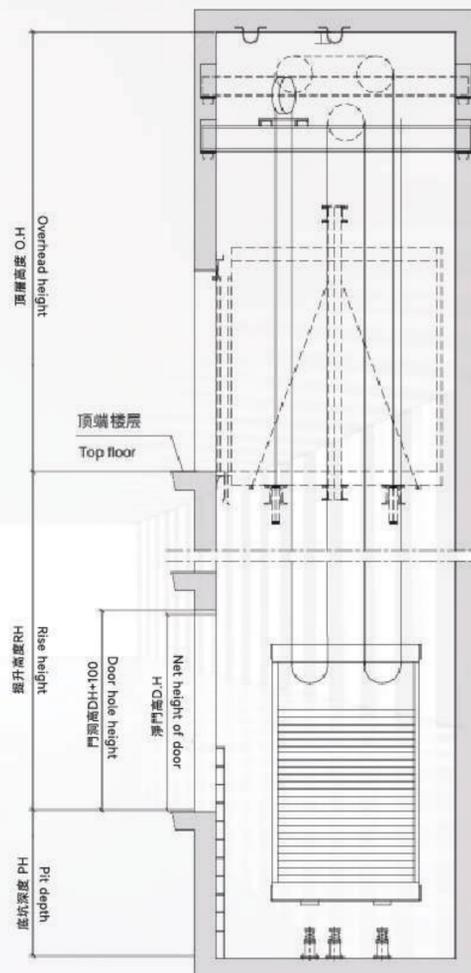

無機房載貨電梯尺寸表 MACHINE ROOMLESS FREIGHT ELEVATOR SPECIFICATIONS

載重量 Loading capacity(kg)	1000	1600	2000	3000	3200	5000
額定速度 Rated speed(m/s)	0.5/1.0					0.5
開門方式 Open the door way	旁開	旁開雙折	中分雙折	旁開雙折	中分雙折	中分雙折
開門尺寸 (mm) Door opening size	1200*2100	1400*2100	1500*2100	1500*2100	1800*2100	2400*2300
出入口 (mm) Exit and entrance	單通	單通 貫通				
牽引比	2:1	4:1				
車廂尺寸 (mm) Car size	寬CW	1400	1600	1900	2230	2400
	深CD	1700	2200	2200	2600	2600
	高CH	2200				
井道尺寸 (mm) Hoist way size	寬MRW	2350	2900	3250	3700	4400
	深MRD	2150	2720	2720	3120	4120
頂層高度OH	4800					5200
底坑深度PH	1600					1800
最大提升高度RH	30					30

注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準。更大載重貨梯規劃請洽本公司服務電話。
 Note: Only for reference, final manufacture please follow contract. Please contact the company's service number for larger freight elevator.




大噸位載貨電梯尺寸表 LARGE LAODING CAPACITY FREIGHT ELEVATOR SPECIFICATIONS

載重量 Loading capacity(kg)	6000	7000	8000	9000	10000	12000
額定速度 Rated speed(m/s)	0.5	0.5	0.5	0.5	0.5	0.5
開門方式 Open the door way	中分雙折	中分雙折	中分雙折	中分雙折	中分雙折	中分雙折
開門尺寸 (mm) Door opening size	2400*2300	2400*2300	2600*2300	2600*2300	2600*2300	2800*2300
出入口 (mm) Exit and entaince	單通	貫通	單通	貫通	單通	貫通
轿廂尺寸 (mm) Car size	寬CW	2600	2900	2900	3200	3200
	深CD	4100	4200	4700	4700	5300
	高CH	2400				
井道尺寸 (mm) Hoist way size	寬MRW	4000	4200	4400	4600	5100
	深MRD	4620	4720	5220	5220	5820
井道尺寸 (mm) Hoist way size	寬CW	4000	4200	4400	4600	5100
	深CD	4620	4720	5220	5220	5820
	高CH	3000				
頂層高度OH	4800		5000		5200	
底坑深度PH	1600					
最大提升高度RH	30					

注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準。更大載重貨梯規劃請洽本公司服務電話。
Note: Only for reference, final manufacture please follow contract. Please contact the company's service number for larger freight elevator.



觀光電梯尺寸圖

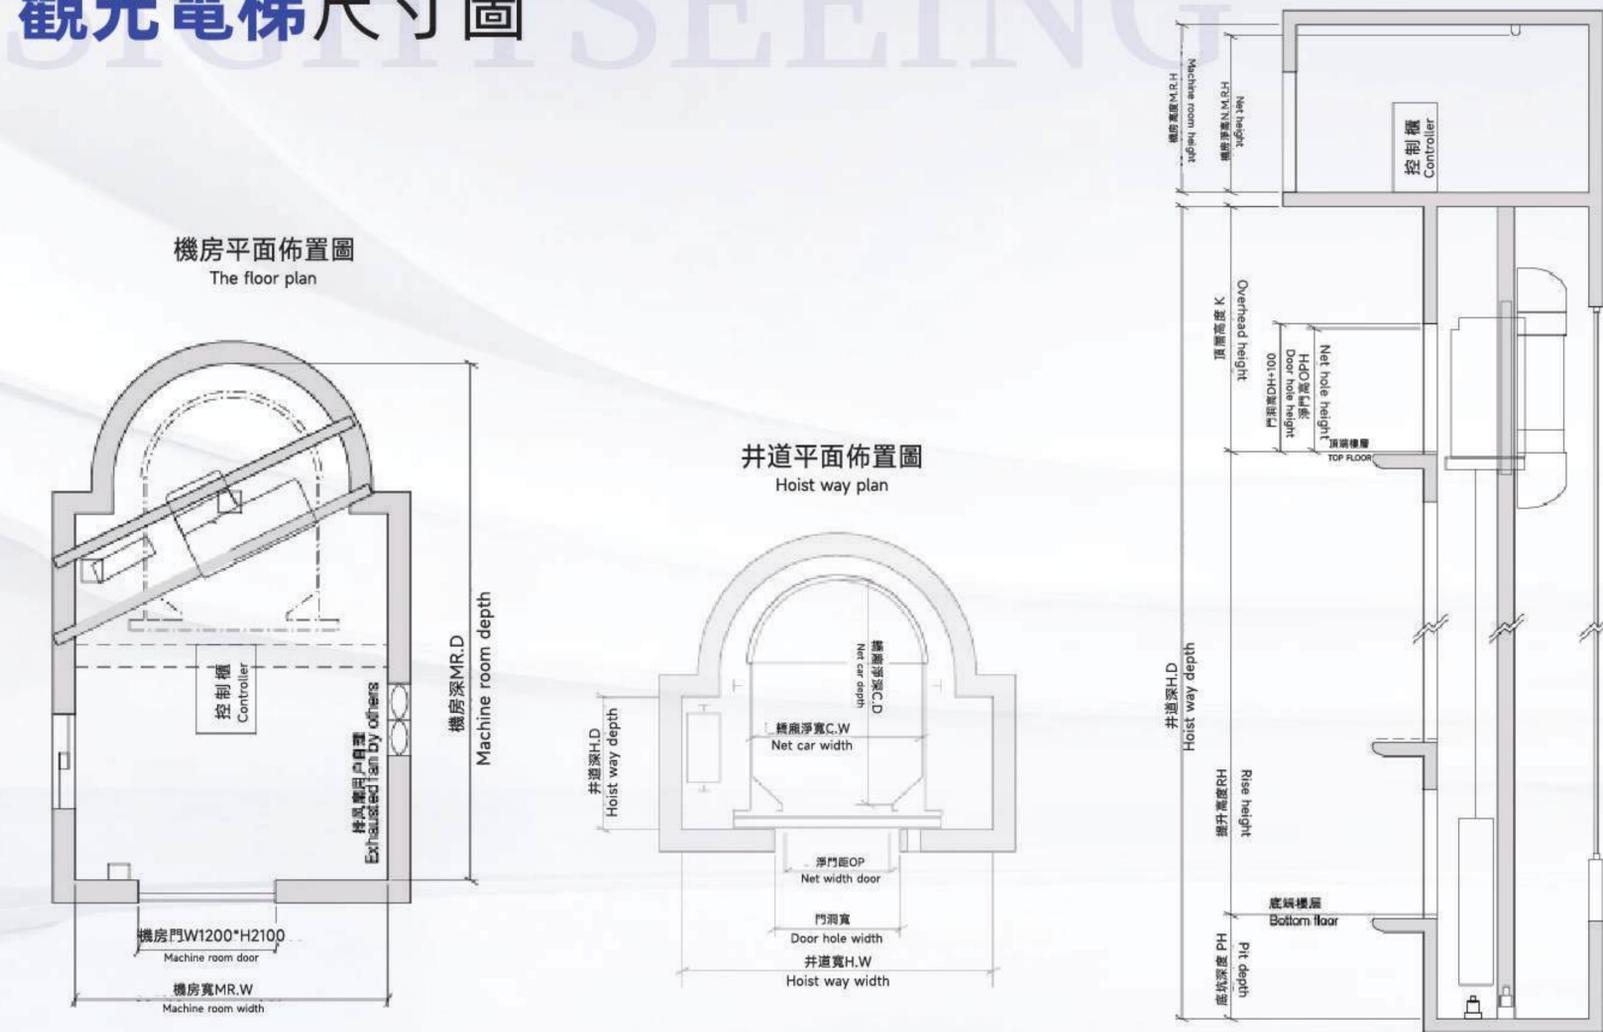



觀光電梯尺寸表 SIGHTSEEING ELEVATOR DIMENSION TABLE

載重量 Loading capacity(kg)		800kg (10 人 Passengers)			1000kg (13 人 Passengers)		
額定速度 Rated speed(m/s)		1.0	1.5	1.75	1.0	1.5	1.75
開門尺寸 (mm) Door opening size		800			900		
轎廂尺寸 (mm) Car size	寬CW	1200			1300		
	深CD	1800			1900		
	高CH	2500			2500		
井道尺寸 (mm) Hoist way size	寬MRW	2400			2500		
	深MRD	2400			2500		
井道尺寸 (mm) Hoist way size	寬CW	2400			2500		
	深CD	2400			2500		
	高CH	2800			2800		
頂層高度OH		4500	4600	4600	4500	4600	4600
底坑深度PH		2000	2000	2000	2000	2000	2000
最大提升高度RH		60	75	90	60	75	90

注：上述尺寸供設計參考，具體尺寸以合同簽約時提供的尺寸圖為準。更大載重貨梯規劃請洽本公司服務電話。

Note: Only for reference, final manufacture please follow contract. Please contact the company's service number for larger freight elevator.